


IP Phones

3100 Series

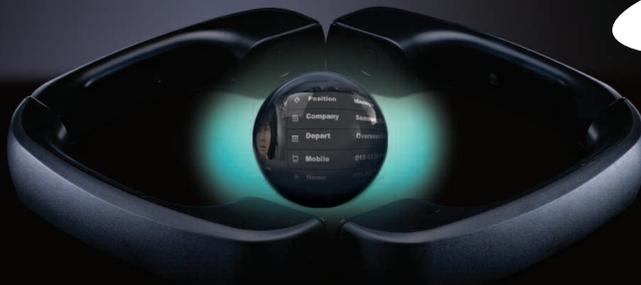

The Smarter way to do business

The Samsung 3100 series IP telephone is a simple but elegant design, ideally suited to users with general day to day telephone requirements.

The 3100 series is easy to use and is a perfect solution for almost anywhere in the work place from the production floor to the management offices, as well as in common areas such as hotel lobbies and reception areas. Other environments where the 3100 series is ideal include classrooms, kitchen areas and retail check outs, in fact almost anywhere where general telephone use is required.



The 3100 design provides a smaller footprint than the 5200 series phones making them well suited for use where space is at a premium.

As an entry level phone, the 3100 series phones provide a number of high value features such as full hands free capability and programmable soft keys, yet offers maximum cost-effectiveness for customers with budgets to manage.

Dual Port reduces the cost of cabling for the PC and phone, also PoE reduces total power outlet requirements and allows support in the case of mains power failure.

The 3100 integrated wall mount capability ensures total flexibility, to meet the demands of any installation.

The 3100 series IP telephone fits well into any business environment delivering a host of features and advanced functionality at a very affordable price.



High Functionality

- Entry-level IP Phone optimized for replacing traditional digital phones
- Price competitive compared with digital phones

Advanced Security

- Security capable of SRTP (Secure Real-time Transport Protocol)

Design differentiation

- Elegant design following Samsung's unique design identity
- Family design with SMT-i5200 series

Wide range of choice

Increased consumer choice due to extended IP phone line-up

Reliability


Reliable and secure voice quality

Full-featured IP Phone

Supports conference, call transfer, call forward and message indication

IP Phones

3100 Series

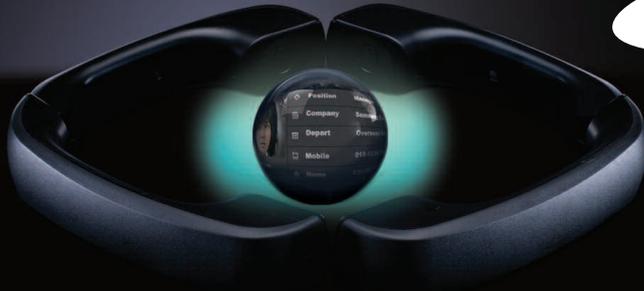

Model	SMT-i3100
LCD	4 line graphic LCD
DSS/BLF	5/0
Context Sensitive Keys	3
Weight	497 g
Dimensions	170 (W) × 199 (L) × 110 (H) mm
Power consumption when using PoE	DC 36-57 V (Standard 48 V); 400 mA
Power consumption when using an adaptor	DC 5 V; 1 A (Max.)
Network Interface	2 Ethernet 10/100BASE-T
PoE Interface	Supports 802.3 a/f standard.
Operation Conditions	Temperature: 0-45°C, Humidity: 10-90%
Etc	Full Duplex Speaker Phone

